

120V 90+ CRI Surface Mount
Wet Location LED Light Squares

Project Name	Type
Catalog #	Date



PRODUCT OVERVIEW

GeoTask™ 120V 90 CRI Wet Location LED Surface Mount Light Squares are perfect for accent lighting, hospitality lighting, task lighting, light mosaics, entertainment centers kitchen, bath and vanity, residential and commercial lighting. Complies with ADA when wall mounted.

Note: GeoTask is wet location certified for ceiling mount only - dry location certified for wall mount.

FEATURES

- 3CCT Selectable: 2700K / 3000K / 4000K
- 120V (remote power supply not required)
- Dimmable (Triac)
- Shallow profile
- Mounts to standard J-Box
- Wet Location (IP54 - ceiling mount only)
- ADA Compliant (wall mounted)
- Edge-Lit Technology for diode-free illumination

NOTE: Do not install in an environment that is outside of the products listed ambient temperature:
Ambient operating temp -4°F – 104°F

SPECIFICATIONS

ELECTRICAL

- 120V
- 10W / 15W / 23W

CERTIFICATIONS


- ETL

OPTICS

- Selectable:
2700K / 3000K / 4000K
- 90+ CRI

WARRANTY

- 5 years

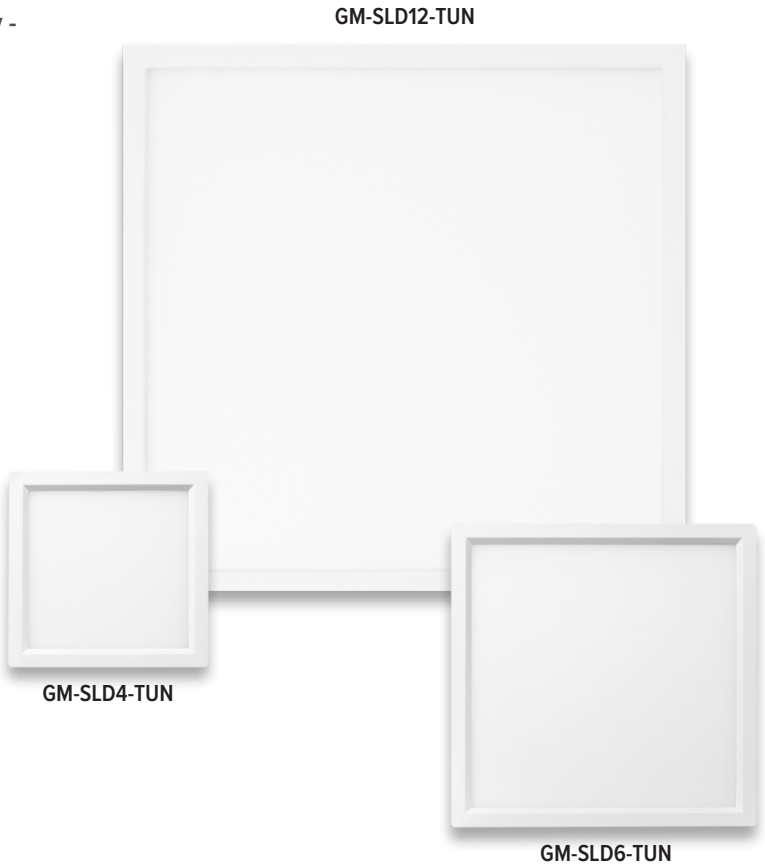

ORDERING INFORMATION



EXAMPLE: GM-SLD4-TUN-WH

Catalog No.	Size	Wattage	Lumens	CRI	Color Temp	Finish
GM-SLD4-TUN	4" sq. x 5/8" depth	10W	540 / 590 / 610	90+	Selectable: 2700K/3000K/4000K	White
GM-SLD6-TUN	6" sq. x 5/8" depth	15W	850 / 910 / 930	90+		White
GM-SLD12-TUN	12" sq. x 5/8" depth	23W	1270 / 1380 / 1490	90+		White


RETROFIT KITS

Catalog No.	Description
GM-SLD4/5-RKT	Retrofit kit for 4" square and 5" round GeoTask
GM-SLD6/8-RKT	Retrofit kit for 6" square and 8" round GeoTask

DIMENSIONS

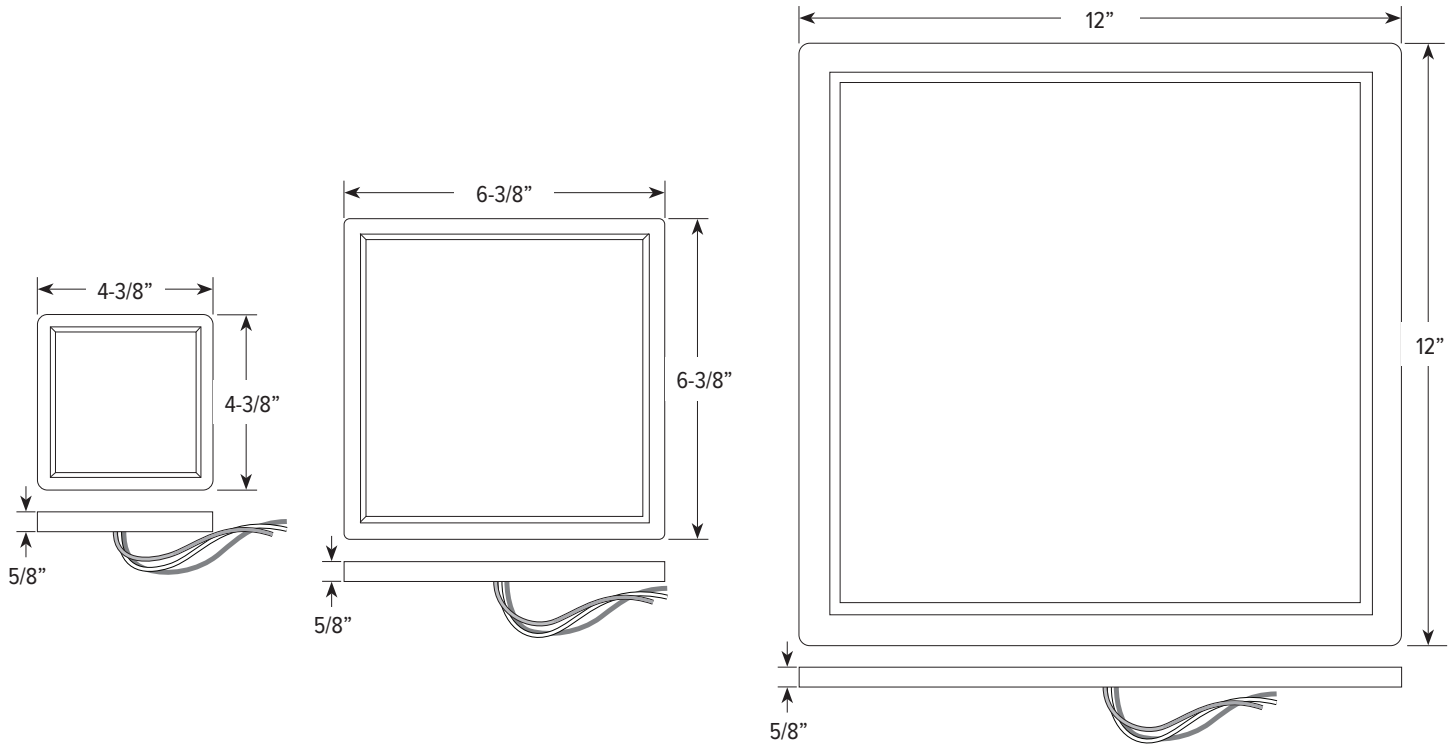

Standard
Junction Box
(Not Included)

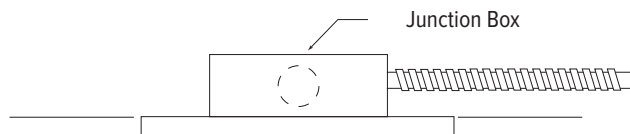

NOTE: Mounts to 2-3/4" or 3-1/2" standard junction box

NOTE: Ambient operating temp range -4F to 104 F. Do not install in an environment that is outside of the product's listed ambient temp.