
ASSEMBLY INSTRUCTIONS

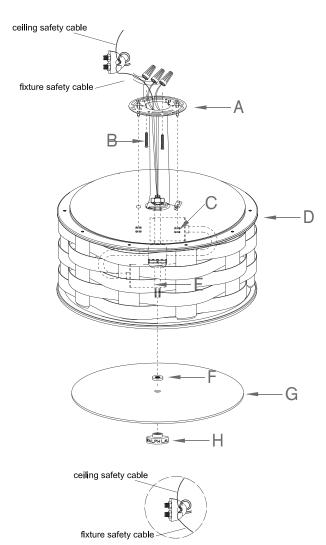

To assemble safety cables:

- 1. Join fixture safety cables with safety cable from ceiling.
- 2. Wrap both safety cable around the cable lock nut.
- 3. Secure by tightening both hex nuts until tight.

Ella Woven Small Flush Mount

Item # RL 4090

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

- 1. Carefully remove all parts from the box. Place on a clean, soft surface.
- 2. Remove mounting plate (A) from base of light fixture (D) by removing cap nuts (C) in counter-clockwise direction.
- 3. Place mounting plate (A) to wall outlet and secure with mounting screws (B) provided.
- 4. Gently pull the wires from the ceiling and allow the wires to hang. Thread the wires through center hole in mounting plate (A).
- 5. Attach fixture steel safety cable to structural member in the ceiling. (Refer to the illustration)
- Attach ground (green) wire to ground wire from wall outlet box (usually
 green or copper in color), fasten together with a plastic wire connector.
 Tighten wrap the wire connector with electrical tape. so the end of the
 connector is sealed.
 - IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
- Connect neutral (white) fixture wire coming from fixture base to neutral (usually white) outlet wire. Fasten both wires together with a plastic wire connector and tightly wrap the wire connector with electrical tape.
- Repeat the procedure with the hot (black) wires. Always make sure that no wire strands are left outside the connectors.
 DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
- Attach fixture base (D) to the affixed mounting plate (A), letting both rods on mounting plate (A) pass through the holes on fixture base (D) and secure with cap nuts (C).










ASSEMBLY INSTRUCTIONS

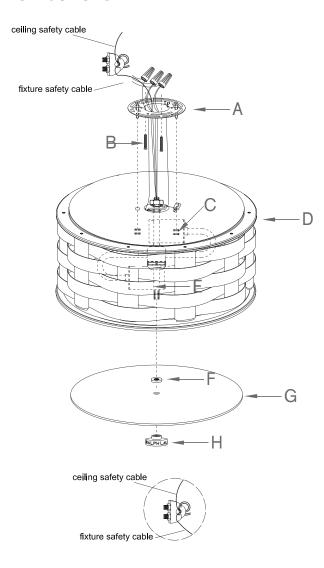

To assemble safety cables:

- 1. Join fixture safety cables with safety cable from ceiling.
- 2. Wrap both safety cable around the cable lock nut.
- 3. Secure by tightening both hex nuts until tight.

Ella Woven Small Flush Mount

Item # RL 4090

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

- 10. Insert light bulbs (not included) into the sockets.
- 11. Remove finial (H) from the threaded section of rod (E), attach glass diffuser (G) to the bottom of fixture base (D), letting the rod (E) pass through the hole of ring (F) and glass diffuser (G) and secure with finial (H).

DO NOT OVERTIGHTEN OTHERWISE THE GLASS WILL BE DAMAGE.

Care Instructions: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.









