

RALPH LAUREN

Upton Large Hanging Lantern

ltem # RL 5156

NOTICE:


This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

- 1. Carefully remove all parts from the box.
- 2. Install the mounting plate (B) to the outlet box by mounting screws (C) provided.
- Using the dimensions of the fixture as a guide, shorten the wire rope. You can press the flexible component (O), push the wire rope (P) into it, then loosen the flexible component (O).
- Unwrap the wiring from the fixture body.Weave the power supply cord through the holder (F) and the lock collar (E) and the canopy (D) and the mounting plate (B).
- 5. When you reach the canopy,measure the wires and cut. Be certain to leave enough to connect inside of the canopy.
- Connect the fixture ground (bare) wire with the ground wire from the outlet box using wire nut (A). If your house does not have ground wire, then attach this wire to the green grounding screw inside of the outlet box.

IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.

- 7. Connect the fixture Neutral wire (ribbed, no markings) with the neutral wire from the outlet box using wire nut (A).
- Connect the fixture Hot (smooth edge,markings) wire with the hot wire from the outlet box using wire nut (A).
 DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
- 9. Tuck these wire connections neatly into the outlet box to secure.
- Put canopy (D) to the mounting plate (B) and secure with lock collar (E).



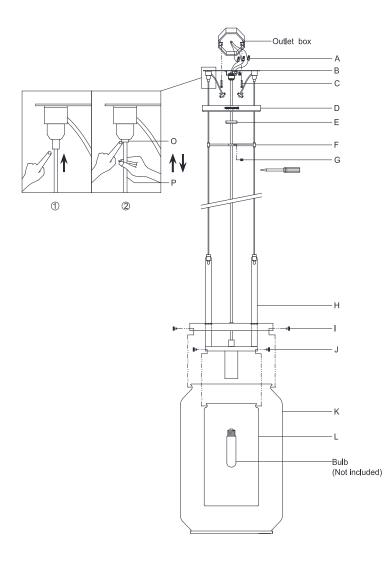

Upton Large Hanging Lantern

ltem # RL 5156

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

- 11. Loosen the set screw (G) on the holder (F) by using the straight screwdriver provided.
- 12. Attach the holder (F) on the appropriate location and secure the set screw (G).
- 13. Attach the inner glass shade (L) to the fixture (H) and secure with screws (J).
- 14. Attach the outside glass shade (K) to the fixture (H) and secure with screws (I).
- 15. Insert bulb (not included) into the socket.
- 16. Installation is complete, turn on power at fuse or circuit breaker.

Care Instructions: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

.

RALPH LAUREN